

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 10/30



Compact

Guide handle without tool folding - fits in any car boot




Plug and Play retrofit kits

Assembly in no time at all - machine can be individually customised

Shipping dimensions in m3

BP 10/30

0,100

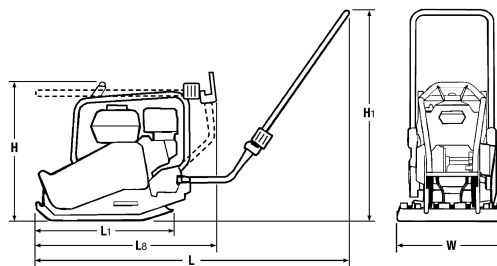

Standard Equipment

- ☒ Vibration insulated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Hand-arm vibrations <5m/s²
- ☒ Automatic shutdown at low oil level
- ☒ Highly wear resistant base plate
- ☒ Recoil starter
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Single point lifting device
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (5l)
- ☐ Spraying system, base plate (320mm)
- ☐ Vulcolan mat
- ☐ Hour meter
- ☐ Special painting
- ☐ Service Kit
- ☐ Tool kit

Dimensions in mm

	H	H1	L	L1	L8	W
BP 10/30	445	433	1066	529	700	320

Technical Data

BOMAG BP 10/30

Weights

Operating weight CECE	kg	53
Basic weight	kg	53

Dimensions

Working width	mm	320
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Briggs&Stratton
Engine type	XR550
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW 2,6
Speed	min-1 3.600
Drive system	mech.
Fuel	Gasoline
Fuel comsump. aver. during operation	l/h 1,1

Exciter system

Frequency	Hz	100
Centrifugal force	kN	10
Amplitude	mm	1,23

Capacities

Fuel	l	2,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 630 01 010

050226 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

